

## TCB-隔爆/增安

TCB系列隔爆非铠装电缆引入装置(填料函、电缆戈兰)

cable gland




<b>材质</b> <b>Material</b>	黄铜镀镍或不锈钢304、316L (订货时请指明) Brass nickel plated or stainless steel 304, 316L (When ordering, please specify)
<b>特点</b> <b>Features</b>	外部密封套的电缆 Cable for external sealing sleeve
<b>防爆标志</b> <b>Ex mark</b>	Ex eIIc Gb
<b>防护等级</b> <b>Degree of protection</b>	IP68
<b>工作温度</b> <b>COT</b>	-60°C ~100°C



1、密封圈材质: 硅橡胶(-60°C~+80°C)  
2、用于区1区2、20、21区和22区

1, sealing material: silicone rubber (-60 or C~+80 or C)  
2, 2, 20, 21, 22 and 1 in the area.

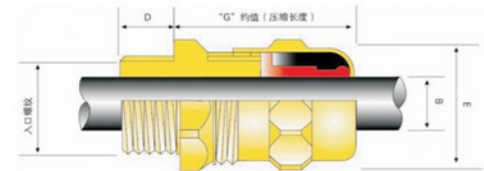

单位:mm

规格型号 Gland size	入口螺纹尺寸AG Entry thread size AG		螺纹长度 D Threadlength D	外层电缆 B Outher sheath B	最大外径E Max Across Corners E	G
	公制ISO Metric ISO	NPT/G				
TCB-01S	M20 × 1.5	1 / 2	15	6-12	31	40
TCB-01	M20 × 1.5	1 / 2	15	9-16	31	40
TCB-02	M25 × 1.5	3 / 4	15	12.5-20.5	38	43
TCB-03	M32 × 1.5	1	15	16.9-26	45	48
TCB-04	M40 × 1.5	1-1/4	15	22-33	56	50
TCB-05	M50 × 1.5	1-1/2	15	28-41	66	58
TCB-06	M63 × 1.5	2	15	36-51	78	64
TCB-07	M75 × 1.5	2-1/2	15	46-65	101	68
TCB-08	M90 × 1.5	3	15	57-78	116	75

1、可选附件: 变径接头、锁紧螺母、O型圈、平垫、锯齿垫圈、接地片  
2、NPT螺纹长度为有效螺纹长度;

1, optional accessories: a variable diameter joint, a locking nut, O ring, flat pad, serrated washers, grounding piece  
2, NPT thread length for effective thread length;

## TMB-隔爆/增安

TMB系列隔爆非铠装电缆引入装置(填料函、电缆戈兰)

cable gland



<b>材质</b> <b>Material</b>	黄铜镀镍或不锈钢304、316L (订货时请指明) Brass nickel plated or stainless steel 304, 316L (When ordering, please specify)
<b>特点</b> <b>Features</b>	外部密封套的电缆 Cable for external sealing sleeve
<b>防爆标志</b> <b>Ex mark</b>	Ex eIIc Gb
<b>防护等级</b> <b>Degree of protection</b>	IP68
<b>工作温度</b> <b>COT</b>	-60°C ~100°C



规格 Sizes	适用电缆 Cable Range	螺纹外径 Thread O.DC1	入口螺纹尺寸AG Entry thread size AG	螺纹长度 Thread Length C2
TMB-MG6-03	3-1.5	6	M6x1	6
TMB-MG8-04	4-2	8	M8x1	6
TMB-MG10-06	6-2	10	M10x1	7
TMB-MG12S-06	6-2	12	M12x1	8
TMB-MG12-05	5.3-3	12	M12x1	8
TMB-MG12-08	7.8-4.5	12	M12x1	8
TMB-MG14S-06	6-2	14	M14x1.5	8
TMB-MG14-08	7.8-4.5	14	M14x1.5	8
TMB-MG16S-08	7.8-4.5	16	M16x1.5	8
TMB-MG16-06	7-4	16	M16x1.5	9.2
TMB-MG16-10	10-6	16	M16x1.5	9.2
TMB-MG18-10	10-6	18	M18x1.5	9.2
TMB-MG20-09	9-5	20	M20x1.5	9.2
TMB-MG20S-12	12-7	20	M20x1.5	9.2
TMB-MG20-14	14-9	20	M20x1.5	9.5
TMB-MG20-10	11.5-7	20	M20x1.5	9.5
TMB-MG22-14	14-9	22	M22x1.5	9.5
TMB-MG24-14	14-9	24	M24x1.5	10
TMB-MG25-18	18-14	25	M25x1.5	12
TMB-MG25-16	16-12	25	M25x1.5	12
TMB-MG27x2-18	18-13	27	M27x1.5	12
TMB-MG30-18	18-13	30	M30x1.5	12.5
TMB-MG32-25	25-18	32	M32x1.5	12.5
TMB-MG32-22	22-16	32	M32x1.5	12.5
TMB-MG33-25	25-18	33	M33x1.5	12.5
TMB-MG36-25	25-18	36	M36x1.5	14
TMB-MG36-22	22-16	36	M36x1.5	14
TMB-MG40-30	30-24	40	M40x1.5	15
TMB-MG40-25	25-18	40	M40x1.5	15
TMB-MG42-30	30-24	42	M42x1.5	15
TMB-MG48-30	30-24	48	M48x1.5	15
TMB-MG50-39	41-31	50	M50x1.5	15
TMB-MG60S-44	44-38	60	M60x1.5	15
TMB-MG63S-44	44-38	63	M63x1.5	15
TMB-MG63-49	51-44	63	M63x1.5	15
TMB-MG63-46	47-40	63	M63x1.5	15
TMB-MG72-52	52-46	72	M72x1.5	15
TMB-MG75-66	66-56	75	M75x1.5	15
TMB-MG90-77	77-66	90	M90x1.5	20